

### Features

- Recommended Spacing : Upto 5 mtr (For Range Rotor)
- Coverage Diameter : Mister : 1.5 - 4 mtr  
: Range Rotor : 7 - 10 mtr
- Discharge Flow Rates : 50 to 200 ltr
- Operating Pressure Range : 1 to 3 kg/cm<sup>2</sup>
- With support of bayonet nozzle it can be used on high operation pressure
- Pin & Bayonet Connectors are available to connect to Lateral

### Applications

- Green houses
- Horticulture & Agriculture
- Under Tree Cultivation
- Ideal for overhead cooling and frost protection

### Performance Data (Mist Swivel)-Pushfit Type

Swivel Color	Nozzle color	Nozzle (mm)	1.0 Kg/cm <sup>2</sup>		2.0 Kg/cm <sup>2</sup>		3.0 Kg/cm <sup>2</sup>	
			Flow (lph)	Dia. (m)	Flow (lph)	Dia. (m)	Flow (lph)	Dia. (m)
Black	Black	0.8	24	1.8	34	2.0	42	2.2
	Purple	1.0	36	2.0	52	2.3	62	2.5
	Orange	1.2	52	2.3	76	2.6	95	2.9
	Blue	1.4	72	3.0	102	3.2	127	3.4
	Yellow	1.6	90	3.4	130	3.7	160	3.8
	Green	1.8	115	3.6	162	4.0	195	4.2


\*Tested at 25cm above ground.

### Performance Data (Range Rotor)-Pushfit Type

Swivel Color	Nozzle color	Nozzle (mm)	1.0 Kg/cm <sup>2</sup>		2.0 Kg/cm <sup>2</sup>		3.0 Kg/cm <sup>2</sup>	
			Flow (lph)	Dia. (m)	Flow (lph)	Dia. (m)	Flow (lph)	Dia. (m)
Black	Purple	1.0	36	7.0	52	7.5	62	8.0
	Orange	1.2	52	7.5	76	8.3	95	8.5
	Blue	1.4	72	7.8	102	8.8	127	9.4
	Yellow	1.6	90	8.0	130	9.4	160	9.7
	Green	1.8	115	8.3	162	10.3	195	10.5

\*Tested at 25cm above ground.

## Accessories

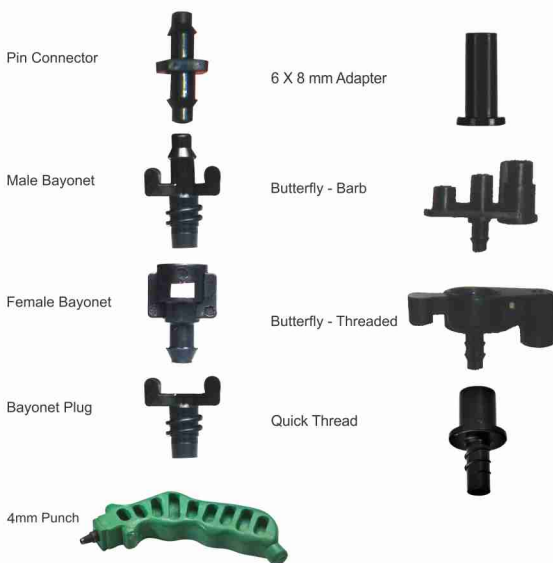

### MICRO TUBES :

- 3mm X 5mm PVC Tube
- 4mm X 7mm PVC Tube
- 8mm X 12mm PVC Tube
- 4mm X 6mm PVC & PE Tube
- 5.5mm X 7.5mm PE Tube



### Spikes

